


# CRT ADAPTER



# MODEL CR-37

ASSEMBLY  
WITH WIRES  
523-847-9-001

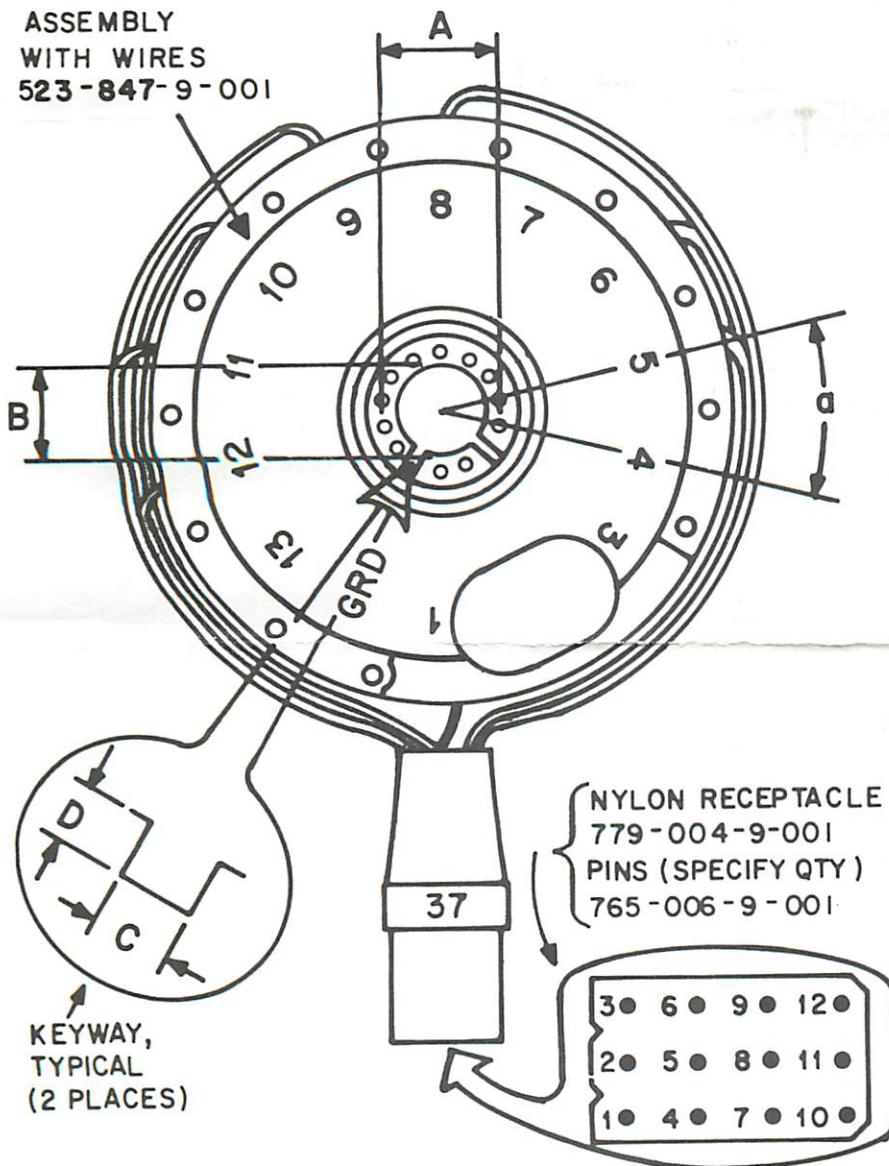

## WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	WHT	12
2	—	—
3	keyway	—
4	BLU	9
5	WHT/BLU	3
6	BLK	1
7	BRN	2
8	—	—
9	RED	8
10	WHT/RED	7
11	WHT/GRN	6
12	YEL/GRN	5
13	GRN	10
14	keyway	—

### FITS CRT DIMENSIONS:

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.4 mm/0.449" max.
- C = keyway width = 2.00 mm/0.079" max.
- D = keyway depth = 4.25 mm/0.167" max.



B & K-Precision, Factory Service Department  
Maxtec International Corporation  
6470 West Cortland Street  
Chicago, Illinois 60635  
Telephone: (312) 889-1448

Used with B & K-Precision Models: 467, 470, 480, 490.

TUBE TYPE	HEATER VOLTAGE
710AB22	6.3
A67JHG00X	6.3
A67JHG01X	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the **B & K-Precision** chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

**B & K-PRECISION, FACTORY SERVICE OPERATIONS**  
MAXTEC INTERNATIONAL CORPORATION  
6470 West Cortland Street  
Chicago, Illinois 60635  
Telephone #: (312) 889-1448

For information on ordering a subscription.

